

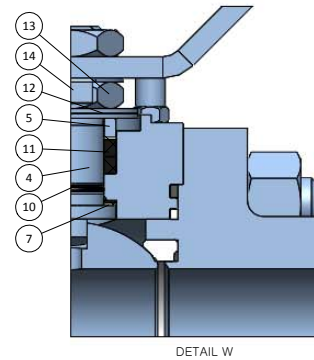




DF Series - PN16
 FIRE SAFE DESIGN - ATEX
 FULL BORE - DN 20 ÷ 50 (¾" ÷ 2")
 FLANGED PN16 ENDS

DF1F1F9F9FF3

A182 F316-316L • CG-RPTFE

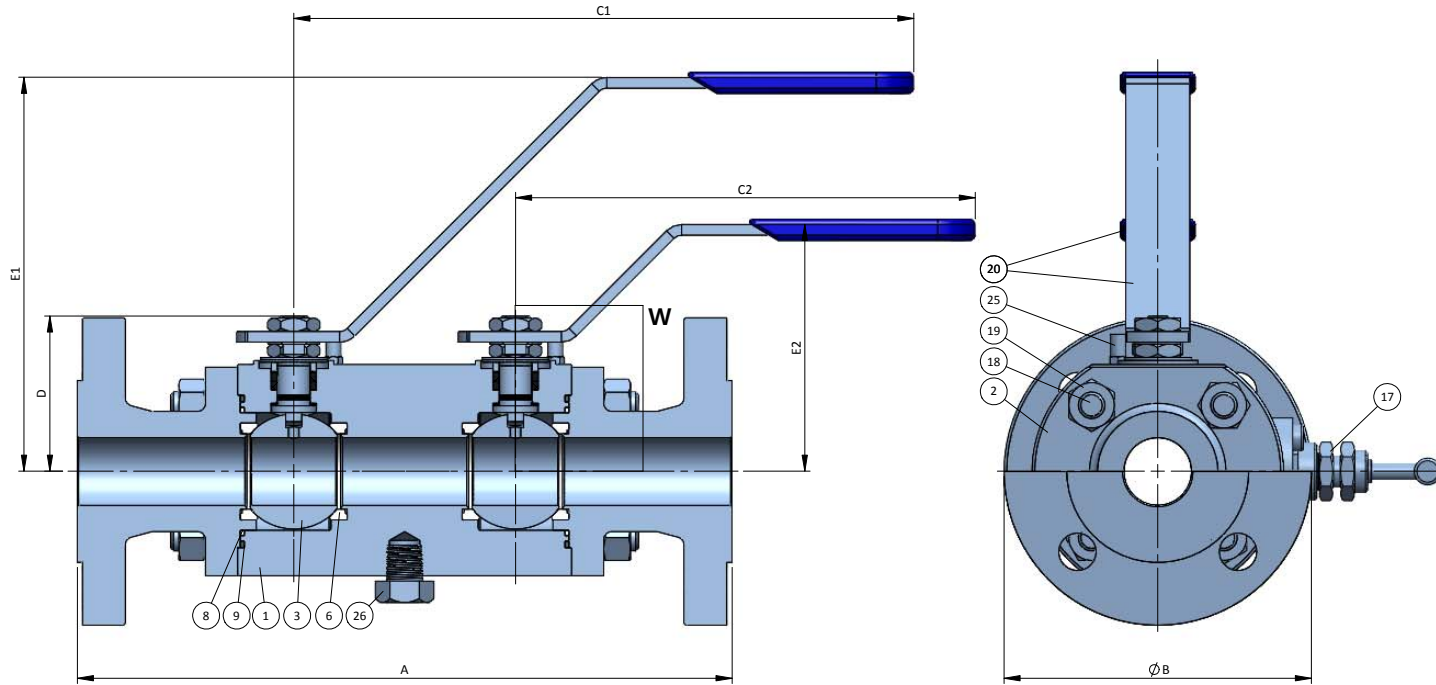

Part	Qt.	Description	Materials
1	1	Body	A182 F316-316L
2	2	End	A182 F316-316L
3	2	Ball	F316/CF8M
4	2	Stem	A182 F316-316L
5	2	Gland Packing	A182 F316-316L
6	4	Seat	CG-RPTFE
7	2	Stem Thrust Seal	CG-RPTFE + PEEK
8	2	1 st Body Seal	CG-RPTFE
9	2	2 nd Body Seal	GRAPHITE
10	2	O'Ring	VITON
11	2	Stem Packing Set	GRAPHITE + PEEK
12	4	Disc Spring	STAINLESS ST. 316
13	4	Stem Nut	STAINLESS ST. 316
14	2	Locking Clip	STAINLESS ST. 316
15	2	Stop Pin	STAINLESS ST. 304
16	1	Plug	A182 F316-316L
17	1	Bleed	A182 F316-316L
18	-	Stud	A193 Gr. B8M Cl.2
19	-	Nut	A194 Gr. 8M
20	1	Handle	CARBON ST. ZINC. / VINYL

DN / Size		Dimensions								ISO 5211	Weight Approx. Kg
mm	inch	Ball Port	A	B	C1	C2	D	E1	E2		
20	¾"	20.7	240	105	170	170	54	145	89	F04	-
25	1"	25.4	245	115	230	170	58	147	92	F04	-
40	1½"	38.1	300	150	230	230	76	172	117	F05	-
50	2"	49.0	310	165	230	230	84	175	125	F05	-